



Power cable H05Z1Z1-F

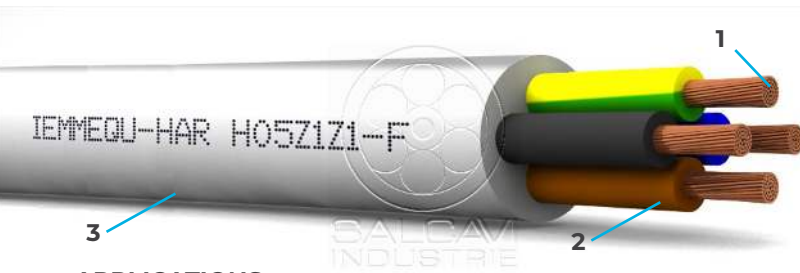

1. Electrolytic bare flexible copper conductor
2. Halogen-free thermoplastic insulation, TI6 type
3. Halogen-free thermoplastic outer sheath, TM7 type



APPLICATIONS



Suitable for all applications where a cable with a very small amount of halogens and, moreover, and having low emission of smoke and corrosive gases when exposed to fire, is required. They are suitable also for applications that undergo to medium mechanical stress (such as wiring of washing-machines, spin dryers, fridges and refrigerators).

Technical Data			
Temperature range	- 20 ÷ 70 °C (@ fixed installation)	Flame resistance	IEC 60332-1-2, CPR class Eca
Short-circuit temperature	160 °C	Halogen-free	EN 50525-1, EN 50267-2-2, EN 50267-2-1
Voltage rating	300/500 V AC	Bending radius	≥ 9 x D (@ fixed installation)
Test voltage	2000 V AC	Suitable for indoor use	

Size conductor [mm ²]	Conductor stranding [N° x mm]	Electrical resistance [Ω / Km]	Diameter on insulation [mm]	Radial thickness of insulation [mm]
0.75	24 x 0.193	≤ 26.0	2.33 ± 0.1	≥ 0.60
1	32 x 0.193	≤ 19.5	2.47 ± 0.1	≥ 0.60
1.5	28 x 0.243	≤ 13.3	2.85 ± 0.1	≥ 0.70
2.5	48 x 0.243	≤ 7.98	3.6 ± 0.1	≥ 0.80
4	52 x 0.300	≤ 4.95	4.1 ± 0.1	≥ 0.80

Size conductor [mm ²]	Outer diameter [mm]	Thickness of jacket [mm]
2 x 0.75	6.2 ± 0.2	≥ 0.80
3 x 0.75	6.5 ± 0.2	≥ 0.80
4 x 0.75	7.1 ± 0.2	≥ 0.80
5 x 0.75	8.1 ± 0.2	≥ 0.90
2 x 1	6.5 ± 0.2	≥ 0.80
3 x 1	6.9 ± 0.2	≥ 0.80
4 x 1	7.8 ± 0.2	≥ 0.90
5 x 1	8.35 ± 0.2	≥ 0.90
2 x 1.5	7.3 ± 0.2	≥ 0.80
3 x 1.5	7.9 ± 0.2	≥ 0.90
4 x 1.5	9.0 ± 0.2	≥ 1.0
5 x 1.5	9.85 ± 0.2	≥ 1.1
2 x 2.5	9.3 ± 0.2	≥ 1.0
3 x 2.5	10.0 ± 0.2	≥ 1.1
4 x 2.5	10.75 ± 0.3	≥ 1.1
5 x 2.5	12.3 ± 0.3	≥ 1.2
2 x 4	10.6 ± 0.2	≥ 1.1
3 x 4	11.3 ± 0.2	≥ 1.2
4 x 4	12.4 ± 0.3	≥ 1.2
5 x 4	14.0 ± 0.3	≥ 1.4